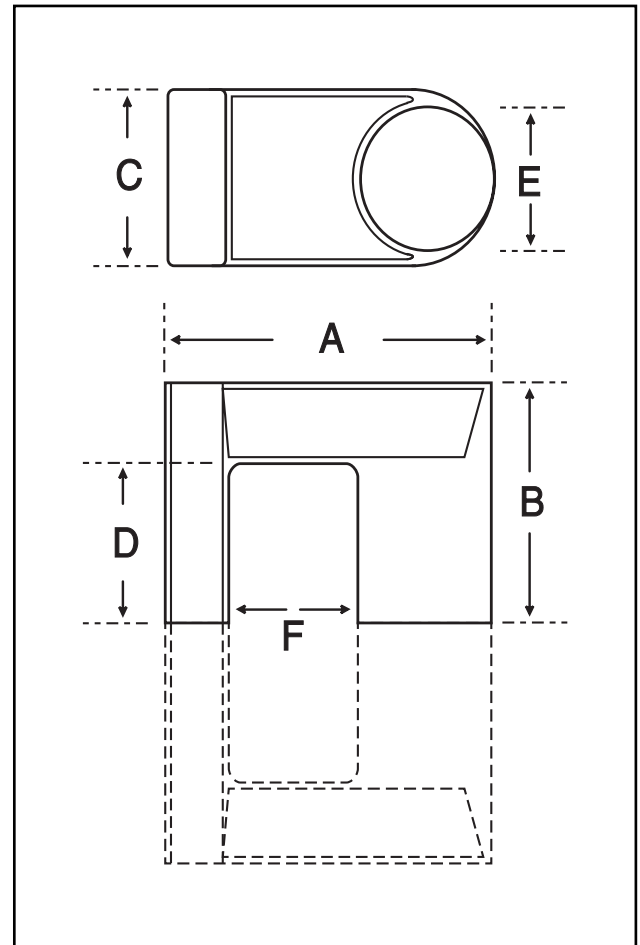


Dimensions

Symbol	Value (mm)
'A'	36.10-37.70
'B'	26.00
'C'	17.60-18.40
'D'	16.30 min
'E'	14.40-15.00
'F'	13.90-15.90

Effective Geometric Parameters

Parameter	Symbol	Value	Unit
$\Sigma(l/A)$	C_1	0.833	mm^{-1}
effective magnetic path length	l_e	125.00	mm
effective area of magnetic path	A_e	150.00	mm^2
minimum area of magnetic path	A_{\min}	-	mm^2
effective volume	V_e	18750	mm^3

Electrical Specification

Grade	A_L Value	Tolerance on A_L (%)	Gap Length (mm)	Eff. Permeability	Part No.
F5A	3125	+30/-20	-	≈ 2080	34-538-49