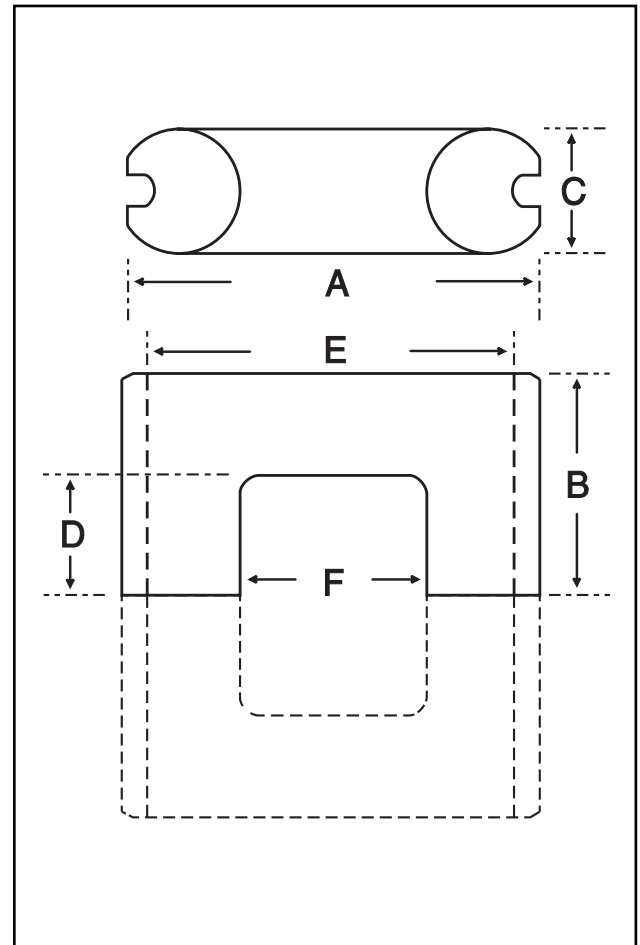


Dimensions

Symbol	Value (mm)
'A'	56.92-58.08
'B'	37.49-37.99
'C'	15.62-16.12
'D'	25.15-25.65
'E'	49.51-50.57
'F'	26.54 min

Effective Geometric Parameters

Parameter	Symbol	Value	Unit
$\Sigma(l/A)$	C_1	1.046	mm^{-1}
effective magnetic path length	l_e	190.38	mm
effective area of magnetic path	A_e	182.00	mm^2
minimum area of magnetic path	A_{\min}	-	mm^2
effective volume	V_e	34649	mm^3

Electrical Specification

Grade	A_L Value	Tolerance on A_L (%)	Gap Length (mm)	Eff. Permeability	Part No.
F5	1980	+30/-20	-	≈ 1830	34-526-25
F48	1900	+30/-20	-	≈ 1780	34-526-48