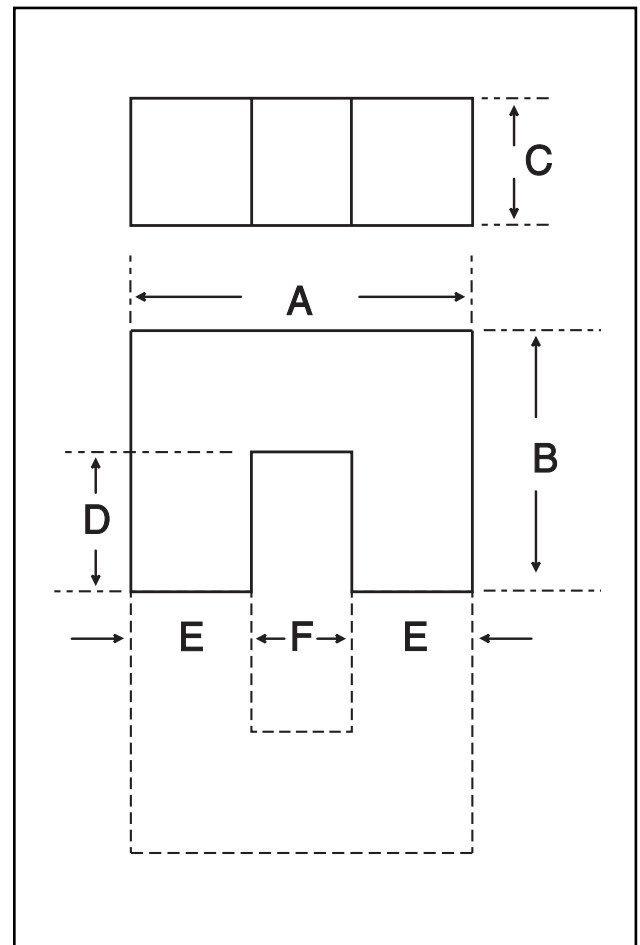


Dimensions

Symbol	Value (mm)
'A'	91.20-94.80
'B'	75.50-76.50
'C'	15.50-16.50
'D'	47.10-48.90
'E'	27.50-28.50
'F'	34.60 min

Effective Geometric Parameters

Parameter	Symbol	Value	Unit
$\Sigma(l/A)$	C_1	0.79	mm^{-1}
effective magnetic path length	l_e	354.00	mm
effective area of magnetic path	A_e	448.00	mm^2
minimum area of magnetic path	A_{\min}	-	mm^2
effective volume	V_e	159000	mm^3

Electrical Specification

Grade	A_L Value	Tolerance on A_L (%)	Gap Length (mm)	Eff. Permeability	Part No.
F48	3100	+30/-20	-	≈ 1950	34-055-48